




Physical Address:
CRANE Instrumentation & Sampling
405 Centura CT,
Spartanburg, SC 29303-6603
Phone: (864) 574-7966
Fax: (864) 587-5608
Email: [Click Here](#)

Mailing Address:
HOKE
PO Box 4866,
Spartanburg, SC 29305-4866

Item # HM832212P10E, Double Block & Bleed Gauge Valves, Model-HM8322

Note: The body & trim parts on all 316/316L Valves & Manifolds comply to NACE MR-01-75 & NORSOK M-650 as standard.

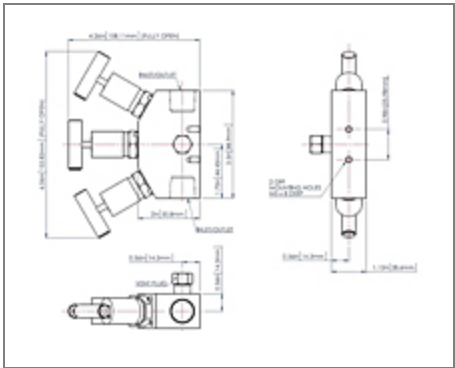

[Specifications](#) | [Application](#) | [Pressure Equipment Directive](#)

Specifications	
Type	Remote - Double Block & Bleed
Fixed	2
Tip	Hard
Packing	GRAFOIL
Inlet Connection	Socket Weld
Inlet Size	10 mm
Alloy	Carbon Steel
Weight	2.87 lb 1.3 kg

Maximum pressure at 212 °F (100 °C)	6000 psi 413 bar
--	---------------------

Maximum pressure at 842 °F (450 °C)	3300 psi 230 bar
--	---------------------

Application

High integrity instrument isolation of pressure gauges and pressure transmitters.

Pressure Equipment Directive

Due to internal bore size and internal volumes up to and including 1"/25mm, products offered in this catalogue comply with S.E.P (Sound Engineering Practice) article 3, paragraph 3 of the Pressure Equipment Directive P.E.D. 97/23/EC and therefore CE marking is not applicable.